

Hi-Vis Braided PVC Hose


Hi-Vis Air & Water RPVC Hose Assemblies

The Hi-Vis properties of this hose are fully compliant with Health & Safety (Chromaticity Luminance) BS EN ISO 5774 & EN471:2003.

Features:

- 20 bar rated
- -20°C to +80°C
- Suitable for potable drinking water
- Self-extinguishing
- High visibility
- Flexible PVC
- UV stable
- Multi-use
- White inner, yellow fluorescent outer
- Material softness BSS50/BS S65


 Working Temperature: -20°C to +80°C

 Maximum Working Pressure: 20 bar

Applications:

- Industrial
- Food
- Wash down
- Garage forecourt
- Workshops
- Vending
- Window cleaning/high rise
- Festivals and outdoor public events

The components used in the production of this hose are compliant with EC and FDA requirements.

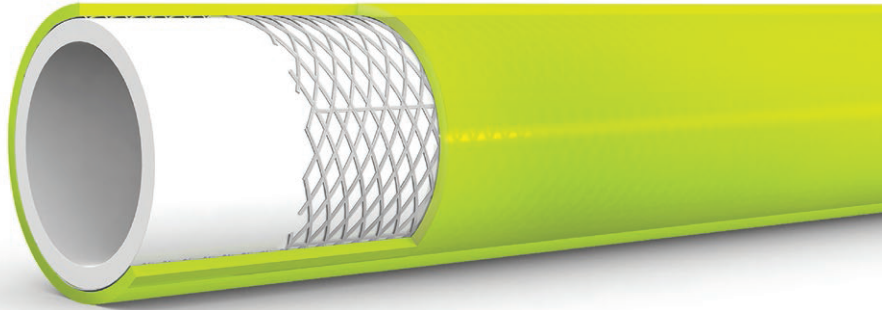

10 Metres, Female Thread, BSPP

0349	ID. mm	mm	mm	£
HVIS06-14F-10M	6.3	1/4"	28	35.65
HVIS08-14F-10M	8	1/4"	29	37.10
HVIS10-38F-10M	10	3/8"	40	41.80
HVIS12-12F-10M	12	1/2"	55	45.20

20 Metres, Female Thread, BSPP

0349	ID. mm	mm	mm	£
HVIS06-14F-20M	6.3	1/4"	28	43.00
HVIS08-14F-20M	8	1/4"	29	46.15
HVIS10-38F-20M	10	3/8"	40	53.55
HVIS12-12F-20M	12	1/2"	55	58.10



- Hydraulics
- Hydraulic Quick Release Couplings
- Pneumatic Quick Release Couplings
- Air Prep, Media, Monitor & Test
- KELM™ Pneumatics
- Pneumatic & Vacuum Equipment
- Valves
- Ring Main Systems
- Adaptors & Fittings
- Stainless Steel
- Malleable Iron
- Hose, Tubing & Couplings
- Clamps & Clips
- Sprays & Adhesives
- Blow Guns, Vacuum & Nozzles
- Pressure Wash, Fuelling & Lubrication
- Air Tools & Compressor Equipment
- Tools, Hardware & PPE