

# Nylon Tubing

## Food Grade Semi Rigid Nylon Tubing



Working Temperature:  
-40°C to +110°C Continuous  
(+140°C Intermittent)

Tech Sheet  
67981

### 30 Metre Coils, Imperial

5010	ID	OD	PSI	£
SRN18	0.075"	1/8"	967	44.70
SRN316	0.117"	3/16"	868	81.90
SRN14	0.170"	1/4"	683	123.85
SRN516	0.212"	5/16"	684	180.05
SRN38	0.250"	3/8"	725	275.25
SRN12	0.375"	1/2"	483	409.30
SRN58	0.500"	5/8"	363	394.00

### 30 Metre Coils, Metric


5010	ID mm	OD mm	PSI	£
SRN4	2.5	4	870	62.00
SRN5	3	5	967	95.25
SRN6	4	6	725	105.25
SRN8	6	8	483	143.40
SRN10	8	10	363	196.85
SRN1012	10	12	290	219.10
SRN15	12	15	363	423.10

## Nylon Multitube Close Tolerance Semi-Rigid



Legris semi-rigid nylon multitube is suited to pneumatic circuits submitted to external aggression. Its PVC sheath is resistant to abrasion, fire, caustic fluids, oils, alcohol etc. The special design sheath and spiral assembly ensure a small bend radius for compact and flexible cabling. For fast identification of circuits, tubes are numbered from 1 to 12 and 6 colours are available.

Note: Available in 50 metre coils.

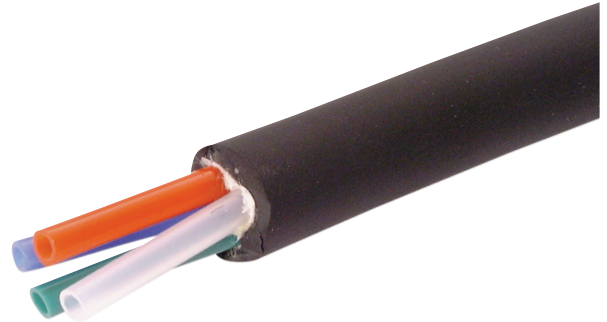

### 10 Metre Coils

1012	Tube Quantity	OD mm	ID mm	£
LE-1010P04 00M04	4	4	2.7	45.75
LE-1010P04 00M07	7	4	2.7	111.10
LE-1010P06 00M04	4	6	4	98.75
LE-1010P06 00M07	7	6	4	120.20
LE-1010P08 00M02	2	8	6	67.75

For...



## Food Grade Braided PVC Hose



...see page 1322