

Polyurethane Anti-spatter Tube & Hose



12.1 Tubing

Polyurethane Anti-spatter Tube

This PVC/Polyurethane, alloy tubing has been developed by taking 98A durometer polyurethane as the inner tube and jacketing it with a specially formulated flame retardant cover. The jacket protects the tubing from incidental contact with weld spatter.

High abrasion resistance. Non-marking cover. Good flexibility over a wide temperature range. Excellent fitting retention at elevated temperatures.

Transfer of air and water. Induction welding tubing lines. Injection moulding cooling lines. Transfer of deionised water. Robotic and pneumatic air lines. Automotive assembly lines. Safety Factor of 3 to 1.



Temperature Range:
-40°C to +70°C



Tech Sheet
20343

Anti-spatter Tube, 50 Metre Coils

	0306	OD mm	ID mm	PSI	mm	£
S604050MBU	6	4	Blue	159	20	142.70
S604050MGY	6	4	Grey	159	20	142.70
S604050MY	6	4	Yellow	159	20	142.70
S805050MBU	8	5	Blue	188	30	229.60
S805050MGY	8	5	Grey	188	30	229.60
S805050MY	8	5	Yellow	188	30	229.60
S106550MBU	10	6.5	Blue	159	35	315.75
S106550MGY	10	6.5	Grey	159	35	315.75
S106550MY	10	6.5	Yellow	159	35	315.75
S128050MBU	12	8	Blue	145	45	417.05
S128050MGY	12	8	Grey	145	45	417.05
S128050MY	12	8	Yellow	145	45	417.05

Polyurethane Anti-spatter Recoil Hose

Temperature Range:
-40°C to +70°C



Safety Factor of 3 to 1.

Tech Sheet
20344




Blue, Anti-spatter Recoil Hose, 4 Metre Coils, 1/4" BSPT

	0306	OD mm	ID mm	PSI	mm	£
SC60404MBU	6	4	159	15	33.35	
SC80504MBU	8	5	188	20	46.00	
SC10654MBU	10	6.5	159	30	57.45	

Tube & Hose Cutters



Tube Cutter

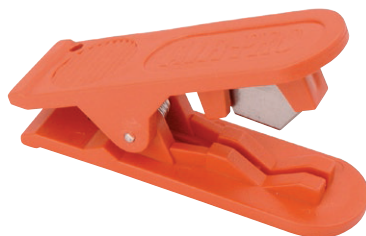

5100



Red


£

7.90

Tube/Hose Cutters



LBS-25



LBS-63N



LBS-120

5100



£

LBS-25	3 - 25	24.65
LBS-120	6 - 42	49.00
LBS-63N	6 - 63	89.65