

# Superior

## Rubber Alloy Air Hose & Assemblies

The **superior** rubber alloy hose is the result of years of research and development to find the optimum compound used to manufacture a hose with the total feel and capabilities of a rubber hose but without the associated disadvantages.

Tech Sheet 20738


- **Braided reinforcement:** high tensile polyester braid
- **Highly flexible:** excellent bend radius with anti-kink capabilities
- **Durable:** excellent abrasion resistance, plus oil and fuel resistant outer cover
- **Silicone free**
- **Safe:** highly visible green stripe for safety against becoming a trip hazard
- **Ideal for outside:** excellent ozone resistance, making it a number one choice for outdoor applications
- **Smooth bore:** consistent internal and external dimensions, with a smooth bore for optimum flow



Working Temperature:  
-20°C to +60°C



Maximum Working Pressure:  
20 bar

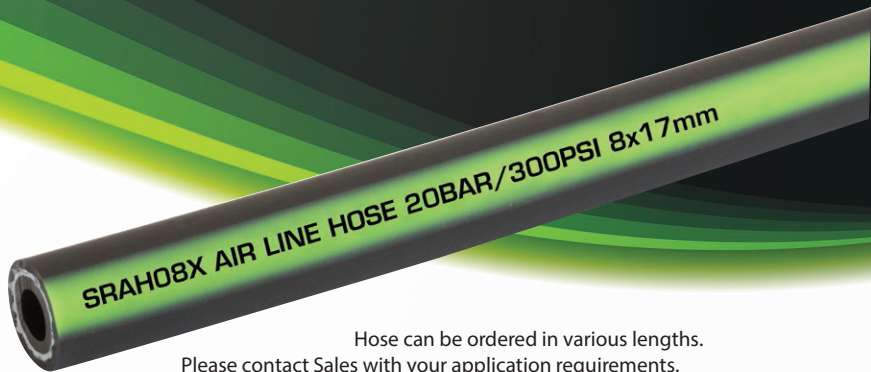

Hose can be ordered in various lengths.  
Please contact Sales with your application requirements.

### Rubber Alloy Air Hose

#### 30 Metre Coils

0410	ID	ID (mm)	OD	£
SRAH06X	1/4"	6.3	14	85.30
SRAH08X	5/16"	8	17	124.55
SRAH10X	3/8"	10	19	136.10
SRAH13X	1/2"	12.5	23	203.40
SRAH19X	3/4"	19	30	285.85
SRAH25X	1"	25	37	392.25

#### 100 Metre Coils

0410	ID	ID (mm)	OD	£
SRAH06X-100	1/4"	6.3	14	314.70
SRAH08X-100	5/16"	8	17	364.35
SRAH10X-100	3/8"	10	19	531.00
SRAH13X-100	1/2"	12.5	23	763.00
SRAH19X-100	3/4"	19	30	804.35
SRAH25X-100	1"	25	37	1048.10