


Mountable Steel Air Hose Reel

- Heavy ribbed steel plate to ensure strong support.
- Spring located in the middle to ensure stability.
- Four direction non-sag rollers to reduce hose wear abrasion.



Maximum Working Pressure:
28 bar

Tech Sheet
10185

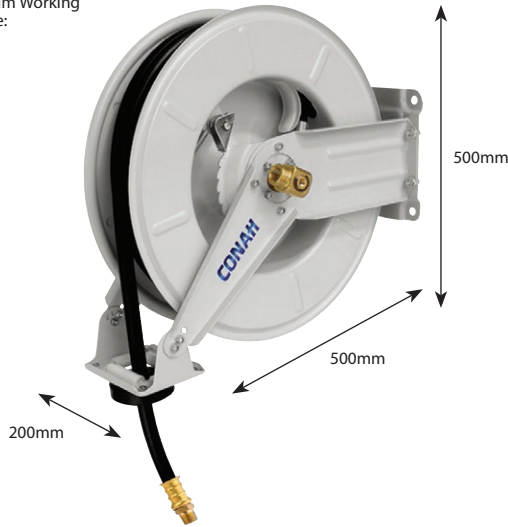

Rubber Air Hose, Spring Rewind, 1/2"

0800



1/2" BSPT



15 mtrs



£

SAHR-15-12

389.60

SAHR-15N-12

-

No Hose

309.25

- Adjustable guide arm for multi position mounting.
- Special swivel joint for easy maintenance and repair.
- Ball bearing swivel joint structure, largely reducing friction.

Tech Sheet
10186



Hi-Vis, Spring Rewind, 1/2"

0800



3/8" BSPT



20 mtrs




£

SAHR-20-12SHV06T

577.25

Tech Sheet
10187

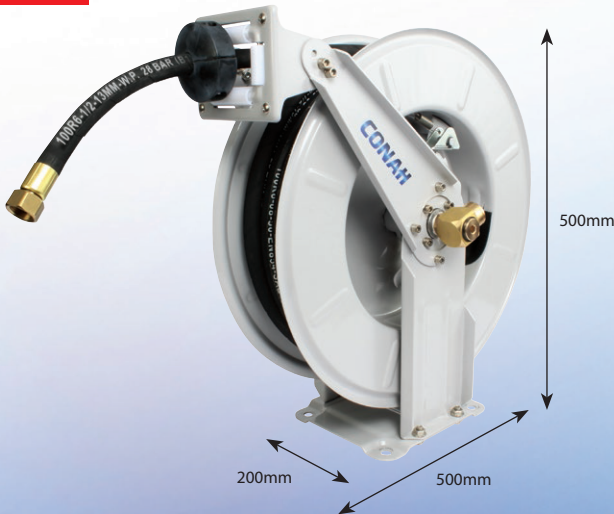

R6, Spring Rewind, 1/2"

0800



1/2" BSPP



15 mtrs




£

SAHR-15-12SR608F

468.15

Tech Sheet
10195

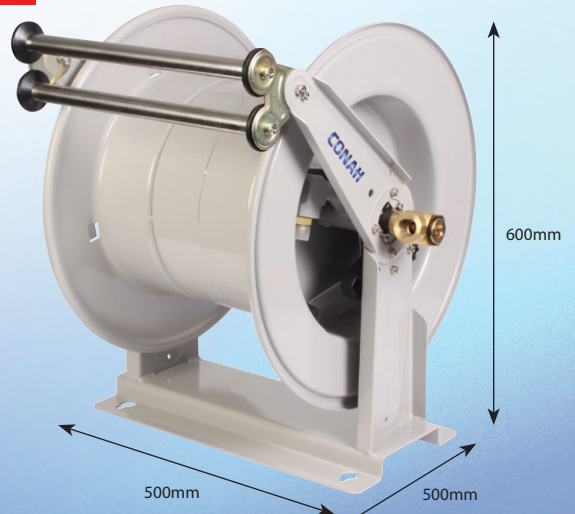

Spring Rewind Without Hose, 3/4"

0800



3/4" Rubber Hose



Capacity



£

SAHR-40N-34

849.35