


Fuelling Equipment & Accessories

Trigger Nozzles

Manual trigger nozzle for use with diesel/gasoil. Suitable for use with gravity or electric pumps up to 80 L/min. Not automatic shut off.

Body: Aluminium
Seals: Nitrile

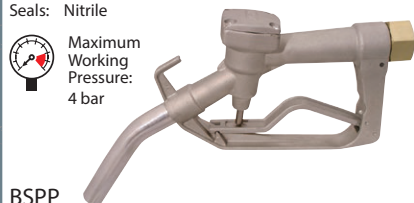

BSPP

0225



1"

£

2019-9295

35.30

Suitable for use with diesel, biodiesel up to B100 & oils to SAE 90.

Aluminium body enclosed in a plastic shell making it comfortable even when used at low temperatures. 1" BSPF swivel inlet.

Can be used with gravity feed tanks or electric pumps. Integral hook for tidy storage when not in use.

Maximum Flow: 150 L/min.



Manual

0225



150

£

NOZ.S3000

54.90

Polypropylene Manual Nozzle

Polyethylene body. 3/4" hose tail. Can be used with gravity feed tanks or electric pumps. Integral hook for tidy storage when not in use.

NOZ.C

Nitrile seals, mild steel spring.

NOZ.CAB

Viton seals, 302 stainless steel spring.

Max. Flow: 60 L/min.



0225

Seal

£

NOZ.C

Nitrile

14.85

Automatic Trigger Nozzles

Only suitable with diesel or biodiesel up to B30. Automatically shuts-off the flow of fuel when vehicle tank is full.

3 position stay open latch. 20-80 L/min, max. pressure 50 psi (3.5 bar).

For use with electric pumps only.

Not suitable for vehicles with small filler necks.

Body: Aluminium



BSPP

0225



3/4"



80

£

2019-9311

2019-9303

1"

80

245.60

245.60



NOZA.60S

Economy, BSPP

0225



1"



60



Red

£

NOZA.60S

NOZA.120S

1"

120

Blue

144.35

207.20

Professional Automatic Nozzle for Diesel

Only suitable with diesel or biodiesel up to B30. Automatically shuts-off the flow of fuel when vehicle tank is full.

3 position stay open latch, which may be disabled if required.


1" BSPF swivel inlet.

For use with electric pumps only.

Not approved for use on resale dispensers.

Max. Flow: Standard 10-80 L/min

High Speed 80-140 L/min

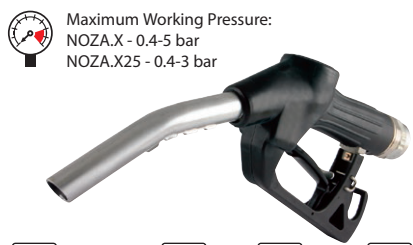

0225



Standard



80

£

NOZA.X

NOZA.X25

Hi Speed

140

155.75

300.25

Stainless Steel Automatic Nozzle

Suitable for use with diesel or Adblue. Automatically shuts-off the flow of fuel when vehicle tank is full.

3 position stay open latch.

304 stainless steel body, viton seals.


Flow rate up to 45 lpm.

For use with electric pumps only.

Inlet: 3/4" (20mm) Hose Barb.

Maximum Flow: 60 L/min.

Tech Sheet 20033

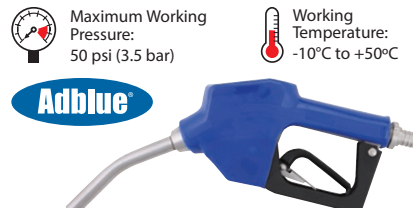

0225

Seal

£

NOZA.SS

Viton

440.80

Nozzle Holder

0225

HANG.P

£

47.10

Universal Reducing Bush

0225

BSH.4.3A



1"



3/4"

£

6.55

You might also need...

hyfitt

Spill Kits



...on page 327