


Electrical Transfer Pumps

Professional Diesel Transfer Pumps

Only suitable with diesel or biodiesel up to B30. Pumping speeds 50, 80 or 100 L/min. 230V or 110V. Direct drive, self priming, vane pumping units. 1" BSPF ports. Switch & 2m long mains cable. Integral filter & bypass. Weatherproof to IP55 for outdoor use. Continuously rated motor with thermal cut out. Full range of spares available.

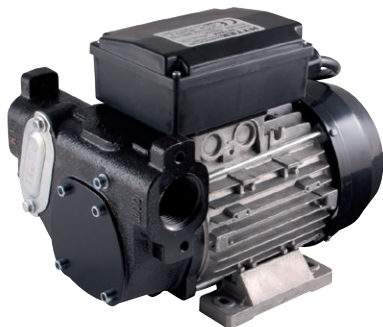

0225			£
SPT60A	230V	50	283.90
SPT70K-110	110V	50	554.50
SPT80A	230V	80	389.90
SPT80K-110	110V	80	816.30
SPT100A	230V	100	745.55
SPT100K-110	110V	110	1049.50

230V Professional Diesel Pump Kit

Only suitable with diesel or biodiesel up to B30. Manual operated on/off switch. Pumping speeds choose 45 or 75 L/min option. Meter accuracy of +/- 2%. 4 digit resettable register. 8 digit non resettable totaliser. Weatherproof to IP55. Integral filter & bypass valve. 230V continuously rated motor with thermal cut out. 4m delivery hose. Choose manual or automatic nozzle options. Self priming pump unit. Dims 300mm H x 350mm W x 500mm D (Including nozzle). 45 Litres Per Minute: Ideal to fill cars/vans vehicles with small fuel tanks. 75 Litres Per Minute: Ideal to fill vehicles with large fuel tanks



45 Litres per Minute

0225	Nozzle	£
ECON45.MAN	Manual	652.25
ECON45	Automatic	797.30

75 Litres per Minute

0225	Nozzle	£
ECON75.MAN	Manual	887.10
ECON75	Automatic	1038.40

Battery Operated Fuel Pump

Ideal for mounting into plant equipment where space is limited. Steel foot mounting plant. 3/4" BSPF female inlet & outlet ports. Built in bypass. Maximum run time: 30 mins

Tech Sheet 1169



For use with Diesel/Gasoil

0225			£
2033-5287	12V	40	261.50
2033-5303	24V	40	261.50

Air Operated Transfer Pumps

Polypropylene Air Operated Diaphragm Pump

1:1 ratio. Max operating pressure 116 psi/8 bar. Rugged Polypropylene body. Viton diaphragm. Maximum solids pumped = 3mm dia. Air inlet 1/4". Suitable for Adblue® & antifreeze.



BSPP

0225			Seal	£
ADP.60PV	3/4"	60	Viton	591.75

Aluminium Air Operated Diaphragm Pump

1:1 ratio. Max operating pressure 116 psi/8 bar. Rugged aluminium body. Nitrile diaphragm. Maximum solids pumped = 3mm dia. Air inlet 1/4". 325mm H x 255mm W x 210mm D



Tech Sheet 10578

BSPP

0225			Seal	£
ADP.60AV	3/4"	60	Viton	674.95
ADP.90AN	1"	90	Nitrile	856.35

Pneumatic Pumps



Tech Sheet 2053

Oil Pumps

0122	Ratio		£
J100	01:01	940mm Suction Tube	293.90
J3005	03:01	270mm Suction Tube	276.75
J5005	05:01	270mm Suction Tube	268.15