

Lubrication Pumps


TM-1 Lubricators are a cost effective and economical electric oil pump for use with up to 20 lubrication points from one pump. Ideally suited for SLR systems.

Discharge Pressure: 1.5 bar to 3.5 bar.

Lubrication Inlet Filter:
40 micron particle separation.

Working Temperature:
+5°C to +20°C

Maximum Working Pressure:
3 bar

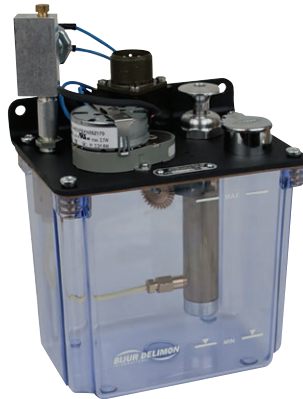

Tech Sheet
68047

TM-1 Lubricator Pumps with Level Switch

0502		Capacity	£
C2895	115/230V AC	0.57 Litre	420.85
D3094	115/230V AC	1 Litre	453.05

TM-1 Lubricator Pumps without Level Switch

0502		Capacity	£
C2798	115/230V AC	0.57 Litre	409.15
D3109	115V AC	1 Litre	424.65

The TM-5 Lubricator Pump is a motor-driven piston pump, spring discharge type. It is extensively used in machine tool applications such as lathes, drilling machines, presses, etc. TM-5 Lubricators are a cost effective and economical electric oil pump for use with up to 50 lubrication points from one pump.

Discharge Pressure: 4.1 bar (max).

Lubrication Inlet Filter:
40 micron particle separation.

Power: 115/230 V AC.

Working Temperature:
-5°C to +20°C

Maximum Working Pressure:
3 bar



Tech Sheet
68045

TM-5 Lubricator Pumps with Level Switch

0502		Capacity	Cycle Time	£
D2986	5/16-24	1 Litre	6.4 Minutes	559.80
D2992	5/16-24	1 Litre	128 Minutes	593.60

TM-5 Lubricator Pumps without Level Switch

0502	Capacity	Cycle Time	£
D2994	1 Litre	6.4 Minutes	549.35
D3189	1 Litre	64 Minutes	542.40

The SureFire II Pump is an automatic, robust and durable electric motor-driven gear pump. Its compact size is designed to fit your space requirements and lubrication demands, and can adapt to a broad range of production machinery. SLR version handles oil.

Working Temperature:
+5°C to +40°C

Maximum Working Pressure:
31 bar

Tech Sheet
68051



SureFire II Pump, SLR, BSPP

0502	Capacity		£
SFX2PASNNAXB	2 Litre	24V DC	1156.40

PDI version handles oil and fluid greases.

Working Temperature:
+5°C to +40°C

Maximum Working Pressure:
31 bar

Tech Sheet
68051



SureFire II Pumps, PDI, BSPP

0502	Capacity		£
SFX2PBSNNXCX	2 Litre	100/115V AC	1551.60
SFX3PBSNNAXD	3 Litre	200/230V AC	1081.30

The EC-L Lubricator is a multipurpose all electrical oiler system, which is capable of depositing a measured volume of oil from each nozzle (in solid drop form) directly onto a moving part such as the link pin of a roller chain.

Working Temperature:
-25°C to +70°C

Maximum Working Pressure:
25 bar

Tech Sheet
68140



EC-L Lubricator

0503		£
1000380	1/4"	2114.70