

Paint Spray & Sewer Jetting Hose

Thermoplastic 1 Wire Airless Paint Spray Hose & Ferrules

Airless paint spray systems for 200 to 325 bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids due to low permeation value of polyamide, the hose is also suitable for industrial gases.


Applications:

High pressure painting
High pressure hydraulics
High pressure solvent, paint, chemicals
High pressure water-jetting

Core: Polyamide
Reinforcement: Single steel wire braid
Cover: Blue colour Polyurethane and optional pin pricked. Available Twin & Multi lines with different hose combination and size.
-40°C to +100°C Temp not to exceed
+70°C for Air and water based fluids.
Other sizes & lengths are available on request.

Tech Sheet
10135

Working Temperature:
-40°C to +100°C

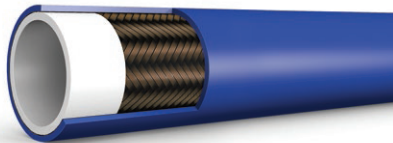

100 Metre Coil

0362	-ID-	OD mm	bar	mm	bar	£
PS1-04	1/4"	11.70	320	30	1280	490.30
PS1-06	3/8"	15.2	250	60	1000	691.35
PS1-08	1/2"	18.4	190	75	760	1112.40

Ferrules to suit PS1
(Fully tested for use with standard inserts)



0362	To Suit Hose I.D.	£
75-810	1/4"	4.60
75-820	3/8"	5.10
75-830	1/2"	5.25

Thermoplastic 2 Wire Airless Paint Spray Hose & Ferrules

Airless paint spray system for 350 to 450 bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids due to low permeation value of polyamide, the hose is also suitable for industrial gases.


Applications:

High pressure painting
High pressure hydraulics
High pressure solvent, paint, chemicals
High pressure water-jetting

Core: Polyamide
Reinforcement: Double steel wire braid
Cover: Blue colour Polyurethane and optional pin pricked. Available Twin & Multi lines with different hose combination and size.
-40°C to +100°C Temp not to exceed
+70°C for Air and water based fluids.
Other sizes & lengths are available on request.

Tech Sheet
10135

Working Temperature:
-40°C to +100°C

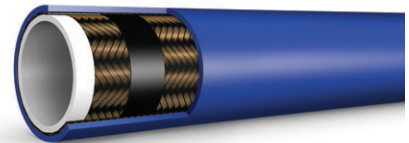

100 Metre Coil

0362	-ID-	OD mm	bar	mm	bar	£
PS2-04	1/4"	13.7	450	100	1800	791.90
PS2-06	3/8"	17.5	380	127	1520	1137.55
PS2-08	1/2"	21.1	300	178	1200	1533.55

Ferrules to suit PS2
(Fully tested for use with standard inserts)



0362	To Suit Hose I.D.	£
75-812	1/4"	4.60
75-826	3/8"	5.10
75-835	1/2"	5.25

Thermoplastic Sewer Jetting Hose 2,500 PSI


Standard Sewer Cleaning vehicles and cleaning equipments. Special construction for optimum cut and wear resistance. Bonded tube and cover. Available in long lengths with a special cover, resistant to microbiological degradation. Lightweight compared to conventional rubber alternatives and increased lifetime.

Core: Thermoplastic Elastomer
Reinforcement: 1 or 2 braids of synthetic fibre
Cover: Orange colour - polyurethane.
Other lengths and pressure ratings are available on request.





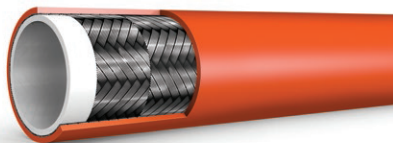


Tech Sheet
10137

Working Temperature:
-40°C to +60°C

Maximum Working Pressure:
175 bar



100 Metre Assembly, BSP Male/Female Connections

0362							
EF301-8	1/2"	20.6	1/2"	175	100	438	1123.80
EF301-12	3/4"	29.2	3/4"	175	125	438	1414.10
EF301-16	1"	36.8	1"	175	160	438	1787.45
EF301-20	1.1/4"	45.7	1.1/4"	175	250	438	3261.95

Thermoplastic Sewer Jetting Hose 3,000 PSI


Standard Sewer Cleaning vehicles and cleaning equipments. Special construction for optimum cut and wear resistance. Bonded tube and cover. Available in long lengths with a special cover, resistant to microbiological degradation. Lightweight compared to conventional rubber alternatives and increased lifetime.

Core: Thermoplastic Elastomer
Reinforcement: 1 or 2 braids of synthetic fibre plus one special extra braid
Cover: Blue colour - polyurethane
Other lengths and pressures available on request.

Tech Sheet
10138





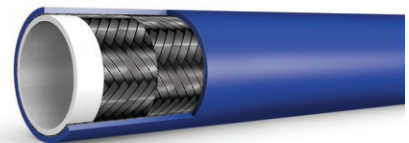


Working Temperature:
-40°C to +60°C

Maximum Working Pressure:
210 bar



Replacement Fittings & Ferrules Available

100 Metre Assembly, BSP Male/Female Connections

0362							
EF302-8	1/2"	22.4	1/2"	210	100	525	1425.45
EF302-12	3/4"	31.8	3/4"	210	125	525	1979.70
EF302-16	1"	38.7	1"	210	160	525	2338.00
EF302-20	1.1/4"	46.7	1.1/4"	210	250	525	3846.35

COLOUR MAY VARY

HYDRAQUIP
HOSE & HYDRAULICS
www.hydraquip.co.uk