


Tech Sheet 10071

Pull Cylinders

- Features
- High strength alloy steel construction
 - Chromed piston rod for wear and corrosion resistance.
 - Baked enamel finish prevent rust and corrosion.
 - High flow EAB-201 quick coupler

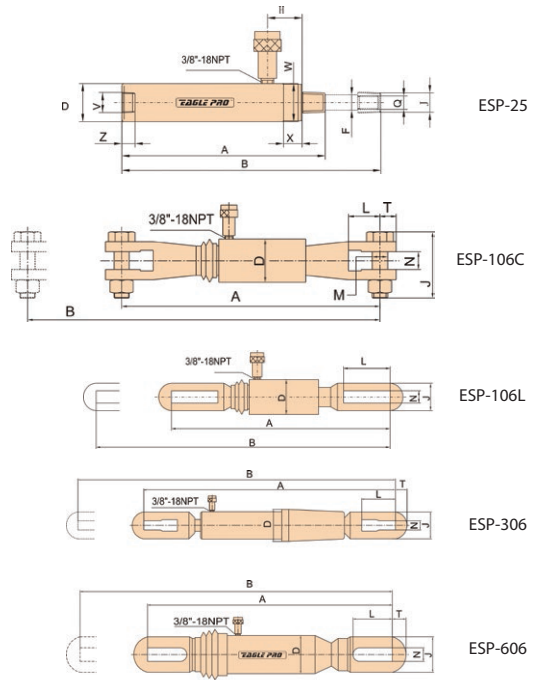

Saddle Style Connector

0346	Capacity Tn	mm	Min. Height mm	Max. Height mm	£
ESP-25	2.5	127	265	392	493.50
ESP-46	5	140	302	442	593.60
ESP-106	10	151	289	440	684.35

Female Style Connector, Gaitered

0346	Capacity Tn	mm	Min. Height mm	Max. Height mm	£
ESP-106C	10	151	587	738	1247.40

Male Style Connector, Gaitered

0346	Capacity Tn	mm	Min. Height mm	Max. Height mm	£
ESP-106L	10	151	542	693	1065.95

Suitable for Loop Connection

0346	Capacity Tn	mm	Min. Height mm	Max. Height mm	£
ESP-306	30	155	1085	1240	3975.75

Suitable for Loop Connection, Gaitered

0346	Capacity Tn	mm	Min. Height mm	Max. Height mm	£
ESP-606	50	152	720	872	4426.80

Hydraulic Spreaders

- Features
- Single Acting/Spring Return
 - EHS-075 for long stroke applications
 - EHS-1 for applications where space is limited



Tech Sheet 10176

Single Acting, Spring Return

0346	Capacity Tn	Min. Height mm	Max. Height mm	£
EHS-075	0.75	32	292	989.20
EHS-1	1	10	93	317.20



LIFETIME WARRANTY