

# Spiral Hose Guard Features

- Provides high strength abrasion resistance for most types of hydraulic, pneumatic and industrial hose assemblies across a wide range of industries including: mining, forestry, drill rigs, plant and agricultural machinery, automotive, marine and offshore
- Exceptional anti-crushing performance
- High abrasion resistance
- Good UV resistance
- Easy installation and routing
- Proven in arduous conditions
- Conveniently coiled and packed in cartons for easy storage
- Suitable for wrapping single hoses or multiple hose looms



Hose I.D.	Hose Type								
	R1AT	R2AT	1SC	2SC	4SP	4SH	R13	R15	R17
3/16"	A	A							
1/4"	B	B	B	B	C				B
5/16"	B	C							B
3/8"	C	C	C	C	D			D	C
1/2"	D	D	D	D	E			E	D
5/8"	D	E							E
3/4"	E	E	E	E	E	E	E	E	E
1"	F	F		F	F	F	F	F	F
1.1/4"	G	G			G	G	G	G	
1.1/2"	G	H			H	H	H		
2"	I	I			I	I	I	I	


Page Tech Sheet 10265

## Protective Hose Sleeves




Flat Type Black, Polypropylene

0369	ID. mm		To Suit	£
FSG-10	10	20 Metres	A	27.70
FSG-12	12	20 Metres	B	30.65
FSG-14	14	20 Metres	-	35.00
FSG-16	16	20 Metres	C	35.60
FSG-20	20	20 Metres	D	44.70
FSG-25	25	20 Metres	E	61.50
FSG-32	32	20 Metres	F	78.45
FSG-42	42	10 Metres	G	69.40
FSG-50	50	10 Metres	H	129.20
FSG-60	60	10 Metres	I	162.40
FSG-74	74	10 Metres	-	172.50
FSG-80	80	10 Metres	-	220.35
FSG-88	88	10 Metres	-	246.95
FSG-100	100	10 Metres	-	306.20
FSG-130	130	10 Metres	-	386.35
FSG-150	150	10 Metres	-	446.40
FSG-200	200	2 Metres	-	166.00

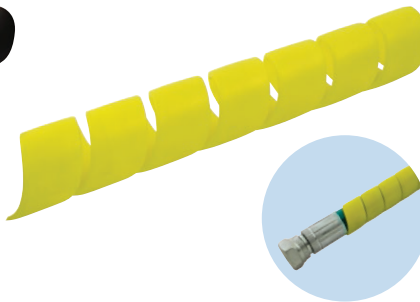

Flat Type Yellow, Polypropylene

0369	ID. mm		To Suit	£
FYSG-10	10	20 Metres	A	33.25
FYSG-12	12	20 Metres	B	33.80
FYSG-16	16	20 Metres	C	41.45
FYSG-20	20	20 Metres	D	51.70
FYSG-25	25	20 Metres	E	72.30
FYSG-32	32	20 Metres	F	89.80
FYSG-42	42	10 Metres	G	78.45
FYSG-50	50	10 Metres	H	140.25
FYSG-60	60	10 Metres	I	174.75

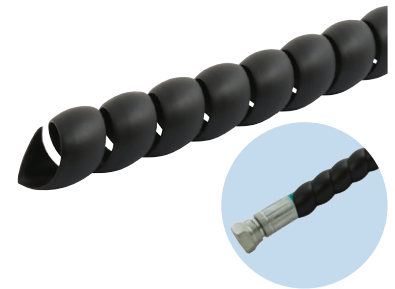

Round Type Black, Polypropylene

0369	ID. mm		To Suit	£
RSG-10	10	20 Metres	A	27.70
RSG-12	12	20 Metres	B	30.65
RSG-16	16	20 Metres	C	35.60
RSG-20	20	20 Metres	D	44.70
RSG-25	25	20 Metres	E	61.50
RSG-32	32	20 Metres	F	78.45
RSG-42	42	10 Metres	G	69.40
RSG-50	50	10 Metres	H	129.20
RSG-60	60	10 Metres	I	162.40

Working Temperature:  
-40°C to +90°C

Available in various colours on request.