 Working Temperature:
-10°C to +80°C

Technical Information:
 • Increase production rates
 • Extend machine life
 • Reduce construction costs


• Reduce maintenance and noise pollution
 • Sizes available from 6mm diameter up to 230mm diameter
 • Complete with cap

Full technical specifications available on request


Shock Absorbers




Self-compensating High Impact Speed

0269	 mm	Max. Energy Absorbed Nm.	Mounting Thread	£
AC-0806-1	6	2	M8 x 1.0	27.15
AC-1005-1	5	3	M10 x 1.0	27.15
AC-1008-1	8	4	M10 x 1.0	29.00
AC-1210-1	10	5	M12 x 1.0	35.05
AC-1412-1	12	15	M14 x 1.5	45.50
AC-1416-1	16	20	M14 x 1.5	45.50
AC-2020-1	20	40	M20 x 1.5	59.40
AC-2050-1	50	60	M20 x 1.5	77.55
AC-2525-1	25	80	M25 x 1.5	72.50
AC-2540-1	40	120	M25 x 1.5	79.15

Self-compensating Medium Impact Speed


0269	 mm	Max. Energy Absorbed Nm.	Mounting Thread	£
AC-0806-2	6	2	M8 x 1.0	27.15
AC-1005-2	5	3	M10 x 1.0	27.15
AC-1008-2	8	4	M10 x 1.0	29.00
AC-1210-2	10	5	M12 x 1.0	35.05
AC-1412-2	12	15	M14 x 1.5	45.50
AC-1416-2	16	20	M14 x 1.5	45.50
AC-2020-2	20	40	M20 x 1.5	59.40
AC-2050-2	50	60	M20 x 1.5	77.55
AC-2525-2	25	80	M25 x 1.5	76.45
AC-2540-2	40	120	M25 x 1.5	79.15

Self-compensating Low Impact Speed

0269	 mm	Max. Energy Absorbed Nm.	Mounting Thread	£
AC-0806-3	6	2	M8 x 1.0	27.15
AC-1005-3	5	3	M10 x 1.0	27.15
AC-1008-3	8	4	M10 x 1.0	27.15
AC-1210-3	10	5	M12 x 1.0	35.05
AC-2020-3	20	40	M20 x 1.5	59.40
AC-2050-3	50	60	M20 x 1.5	77.55
AC-2525-3	25	80	M25 x 1.5	72.50
AC-2540-3	40	120	M25 x 1.5	79.15
AC-3660-3	60	250	M36 x 1.5	132.50



Adjustable


0269	 mm	Max. Energy Absorbed Nm.	Mounting Thread	£
AD-1410	10	20	M14 x 1.5	51.55
AD-0216	16	25	M20 x 1.5	65.95
AD-2525	25	85	M25 x 1.5	94.80
AD-2540	40	100	M25 x 1.5	85.75
AD-3650	50	300	M36 x 1.5	150.15
AD-4225	25	260	M42 x 1.5	218.45
AD-4250	50	500	M42 x 1.5	255.50
AD-4275	75	750	M42 x 1.5	272.10
AD-64050	50	12000	2.1/2" UNF	534.00
AD-64100	100	24000	2.1/2" UNF	557.45
AD-64150	150	36000	2.1/2" UNF	576.60

Accessories

• To aid with precise end positioning.
 Full technical specifications available on request




Stop Collars

0269		£
2120-7352	M8 x 1.0	2.65
2120-7360	M10 x 1.0	3.25
2120-7386	M14 x 1.5	4.35
2120-7394	M20 x 1.5	5.70
2120-7402	M25 x 1.5	8.25
2120-7428	M36 x 1.5	23.10

For...



FTM[®] Malleable Iron Fittings

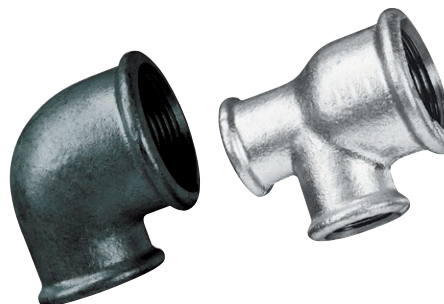

...see pages 1252-1261