


FC234

Applications:


- Diesel fuel, gasoline, hot lube oil and water

Construction:

- AQP elastomer tube
- Brass-plated steel wire reinforcement
- Braided refractory insulation
- Blue AQP elastomer cover

 Working Temperature:
-40°C to +150°C
Fire resistant to:
USCGT/MMT, NMMA/BIA

*Rubber-covered hose styles for use with gases above 17.5 bar (250 psi) must be perforated.

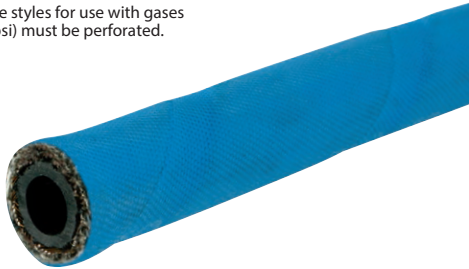

AQP Hose

0235	ID	OD mm	bar	bar	Socket Part No.	£
FC234-06	7.9	17.3	103	414	G1210-6	43.55
FC234-08	10.4	19.8	86	345	G1210-8	65.00
FC234-10	12.7	24.4	86	345	G1210-10	78.05
FC234-12	16	28.2	52	207	G1210-12	88.70
FC234-16	22.4	32.8	28	110	G1212-16	94.45

R5 Reusable Fittings



Reusable Sockets

0235	To Suit Hose	£
G1210-04	FC300, FC234, 1503	2.25
G1210-05	FC300, FC234, 1503	2.75
G1210-06	FC300, FC234, 1503	3.25
G1210-08	FC300, FC234, 1503	4.00
G1210-10	FC300, FC234, 1503	5.80
G1210-12	FC300, FC234, 1503	7.85
G1212-16	FC300, FC234, 1503	8.80
G1212-20	FC300, 1503	14.05
G1212-24	FC300, 1503	16.80
G1212-32	FC300, 1503	50.85
G1212-40	1503	89.25

Reusable Fittings to Suit FC300, FC234 & 1503




BSPP Female Swivel

0235	To Suit Hose I.D. mm	£
11.421-4-4	1/4"	4.8
11.421-6-6	3/8"	7.9
11.421-8-8	1/2"	10.4
11.421-10-10	5/8"	6.4
11.421-12-12	3/4"	16
11.421-16-16	1"	22.4
11.421-20-20	1.1/4"	28.4
11.421-24-24	1.1/2"	35.1
11.421-32-32	2"	46



BSPP Female Swivel, 45° Elbow

0235	To Suit Hose I.D. mm	£
11.045-4-4	1/4"	4.8
11.045-6-6	3/8"	7.9
11.045-8-8	1/2"	10.4
11.045-10-10	5/8"	12.7
11.045-12-12	3/4"	16
11.045-16-16	1"	22.4
11.045-20-20	1.1/4"	28.4
11.045-24-24	1.1/2"	35.1
11.045-32-32	2"	46



BSPP Female Swivel, 90° Elbow

0235	To Suit Hose I.D. mm	£
11.011-4-4	1/4"	4.8
11.011-6-6	3/8"	7.9
11.011-8-8	1/2"	10.4
11.011-10-10	5/8"	12.7
11.011-12-12	3/4"	16
11.011-16-16	1"	22.4
11.011-20-20	1.1/4"	28.4
11.011-24-24	1.1/2"	35.1
11.011-32-32	2"	46