

Tech Sheet 20363

Barrier Pipes

British Gas accepted for water pipe in vented and sealed central heating systems. The pipe has an inner barrier to stop the ingress of atmosphere.



Pex Coils

1400	OD mm	L mtrs	£
10BPEX-25C	10	25	65.25
15BPEX-50C	15	50	129.15
15BPEX-100C	15	100	271.25
22BPEX-25C	22	25	134.30
22BPEX-50C	22	50	253.30


This pipe is made from a soft material with little memory ensuring a flexible system. It has an inner barrier to stop the ingress of atmosphere. British Gas accepted for water pipe in vented and sealed central heating systems.

- Easy to handle
- Ultra flexible



Layflat Polybutylene

1400	OD mm	L mtrs	£
15BPB-25C	15	25	74.20
15BPB-50C	15	50	148.20
15BPB-100C	15	100	296.45
22BPB-25C	22	25	141.25
22BPB-50C	22	50	282.30

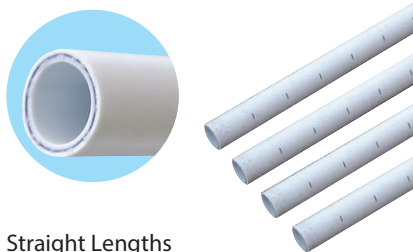

Straight Lengths

1400	OD mm	L mtrs	£	
15BPEX-20X2L	15	2	20	108.55
15BPEX-20X3L	15	3	20	162.65
22BPEX-20X2L	22	2	20	212.80
22BPEX-20X3L	22	3	20	319.15
28BPEX-10X3L	28	3	10	206.65


Tech Sheet 20630

Flexi Hoses



Push-in to BSPP Female

1400	OD mm	£		
FLX15	15	1/2"	300	10.40
FLX18	15	1/2"	500	15.35
FLX16	15	3/4"	300	13.50
FLX20	15	3/4"	500	17.55
FLX22	22	3/4"	300	14.70
FLX19	22	3/4"	500	18.50
FLX23	22	3/4"	500 Full Bore	22.85

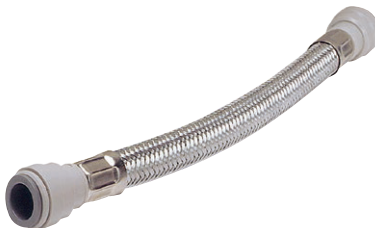

Push-in to Push-in


1400	OD mm	£		
FLX33	15	10	300	8.40
FLX17	15	15	300	13.30
FLX21	15	15	500	19.45
FLX26	22	22	300	16.15
FLX27	22	22	500	22.10



Push-in to BSPP Female with Service Valve

1400	OD mm	£		
FLX37	15	1/2"	300 Full Bore	20.75
FLX24	15	1/2"	300	26.20
FLX31	15	1/2"	500	34.30
FLX38	15	3/4"	500	31.45
FLX25	22	3/4"	300 Full Bore	49.10

N.B. Hot & cold water only, 65°C maximum

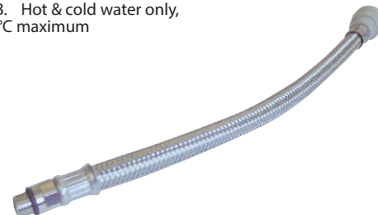

For Monobloc Mixers

1400	OD mm	£		
FLX29	15	M12	300	19.65

N.B. Hot & cold water only, 65°C maximum



Elbow

1400	OD mm	£		
FLX36	15	1/2"	300	13.30

Adaptors



Brass Male Cylinder, BSPP

1400	OD mm	£	
22CMA	22	1"	25.40



Brass Female Cylinder, BSPP

1400	OD mm	£	
22CFA	22	1"	25.40