






Reservoir Accessories

Diffuser - RLD

Specification:

- Used in return line
- Reduces discharge velocity in two stages
- Minimises turbulence and foaming
- Thereby reduces aeration/noise level
- Must be below oil level
- Can eliminate baffle plate in tank
- Consult factory for optional all steel construction

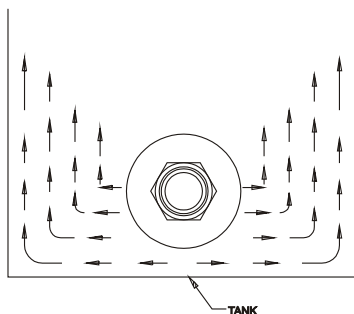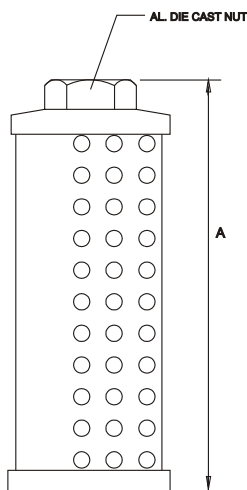

| MODEL | PORT IN. BSPP | A | B | RATED CAPACITY LPM | WT KGS |
|--------|------------------|-----|-----|--------------------------|-----------|
| RLD-12 | 3/4" | 120 | 64 | 50 | 0.34 |
| RLD-16 | 1" | 125 | 86 | 100 | 0.38 |
| RLD-20 | 1 - 1/4" | 160 | 86 | 200 | 0.50 |
| RLD-24 | 1 - 1/2" | 190 | 86 | 300 | 0.70 |
| RLD-32 | 2" | 190 | 100 | 400 | 0.80 |
| RLD-40 | 2 - 1/2" | 200 | 150 | 500 | 0.90 |
| RLD-48 | 3" | 250 | 150 | 600 | 1.00 |