



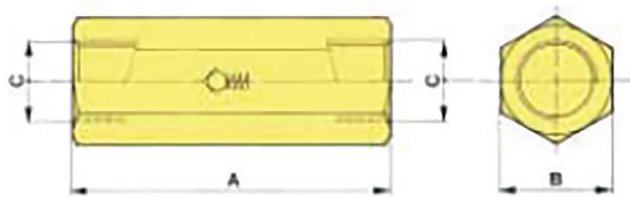

Hydraulic Non-return Valves

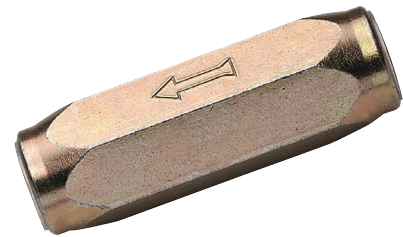

CODE CODICE	C*	Max flow	Max pressure		A		B	
		Max flusso l/min	Max pressione bar	Max pressione psi	mm	in	mm	in
HNRV-14	1/4"	13	350	5000	60	2,36	19	0,75
HNRV-38	3/8"	25	350	5000	70	2,76	24	0,94
HNRV-12	1/2"	40	350	5000	76	2,99	30	1,18
HNRV-34	3/4"	60	300	4300	92	3,62	36	1,42
HNRV-1	1"	90	250	3600	108	4,25	45	1,77
HNRV-114	1.1/4"	160	250	3600	127	5,00	55	2,17
HNRV-112	1.1/2"	210	250	3600	142	5,59	65	2,56

* Standard thread is BSP (GAS). Available threads on request : metric, NPTF, SAE and UNF.
 Filettature standard BSP (GAS) disponibili a richiesta filettature metriche, NPTF, SAE e UNF.