


344 Union taper seat

Torque and notes for installation please find in "Technical Product Notes".
374 G ... refers to the thread size G according to ISO 228 of the union nut 374.

EN		Dim. [inch]	374 G [inch]	Code	b [mm]	s1 [mm]	s2 [mm]	s3 [mm]
-	B	¼	⅝	770 344 102	69	18	28	15
-	G	¼	⅝	770 344 202	69	18	28	15
-	B	⅜	¾	770 344 103	75	22	32	20
-	G	⅜	¾	770 344 203	75	22	32	20
-	B	½	1	770 344 104	85	26	39	23
-	G	½	1	770 344 204	85	26	39	23
-	B	¾	1 ¼	770 344 105	93	32	48	30
-	G	¾	1 ¼	770 344 205	93	32	48	30
-	B	1	1 ½	770 344 106	103	38	55	36
-	G	1	1 ½	770 344 206	103	38	55	36
-	B	1 ¼	2	770 344 107	114	48	67	48
-	G	1 ¼	2	770 344 207	114	48	67	48
-	B	1 ½	2 ¼	770 344 108	123	54	74	54
-	G	1 ½	2 ¼	770 344 208	123	54	74	54
-	B	2	2 ¾	770 344 109	136	66	90	67
-	G	2	2 ¾	770 344 209	136	66	90	67

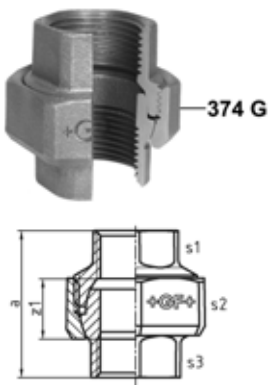

346 Union, spherical seat angular deviation max. 6°, ISO/EN U11

Torque and notes for installation please find in "Technical Product Notes".
374 G ... refers to the thread size G according to ISO 228 of the union nut 374.

EN		Dim. [inch]	374 G [inch]	Code	a [mm]	z1 [mm]	s1 [mm]	s2 [mm]	s3 [mm]
•	B	½	1 ⅝	770 346 104	48	22	26	44	26
•	G	½	1 ⅝	770 346 204	48	22	26	44	26
•	B	¾	1 ¼	770 346 105	52	23	31	48	31
•	G	¾	1 ¼	770 346 205	52	23	31	48	31
•	B	1	1 ½	770 346 106	58	24	38	55	38
•	G	1	1 ½	770 346 206	58	24	38	55	38
•	B	1 ¼	2	770 346 107	65	27	48	67	48
•	G	1 ¼	2	770 346 207	65	27	48	67	48
•	B	1 ½	2 ¼	770 346 108	75	32	54	73	54
•	G	1 ½	2 ¼	770 346 208	75	32	54	73	54
•	B	2	2 ¾	770 346 109	85	32	66	90	66
•	G	2	2 ¾	770 346 209	85	32	66	90	66