


# Anti-vibration Mounts

## Conical Buffers

These mounts are designed to prevent shocks and overloading thanks to their progressive absorption. This range can accommodate weights from 2kg up to 1,400kg.

- Natural rubber, zinc plated in accordance with CE standards, chrome VI free, white
- Stiffness tolerance: +/- 20%

**Applications:** engines, tooling machinery, pumps, special equipment, HVAC and genset.

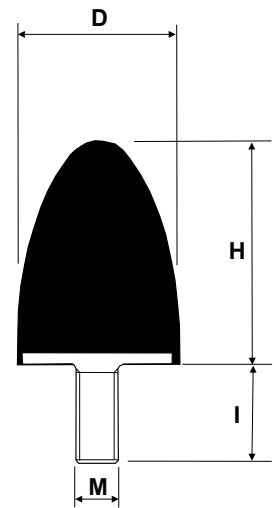

### MALE CONICAL BUFFER

PART CODE	DIAMETER (D) mm	HEIGHT (H) mm	THREAD (M x I) mm	Compression Stiffness Rate Kg/mm	Max Static Deflection mm	Max. Operating Load Kg
MCONBUF-2425	24	25	M6 x 18	8.4	5	41.8
MCONBUF-5050	50	50	M10 x 25	7.2	10	72.4