


Anti-vibration Mounts

Female Buffers

These mounts are designed to prevent shocks and overloading thanks to their progressive absorption. This range can accommodate weights from 2kg up to 1,400kg.

- Natural rubber, zinc plated in accordance with CE standards, chrome VI free, white
- Stiffness tolerance: +/- 20%

Applications: engines, tooling machinery, pumps, special equipment, HVAC and genset.

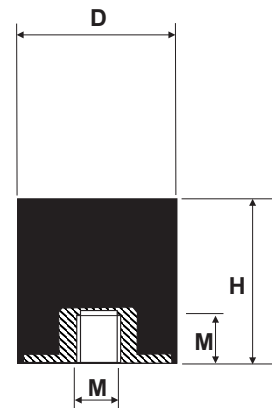

FEMALE BUFFER						
PART CODE	DIAMETER (D) mm	HEIGHT (H) mm	THREAD (M) mm	Compression Stiffness Rate Kg/mm	Max Static Deflection mm	Max. Operating Load Kg
FCB-161004	16	10	M4	8.3	2	16.5
FCB-162005	16	20	M5	4.5	4	17.9
FCB-201506	20	15	M6	13.6	3	40.7
FCB-202506	20	25	M6	5.6	5	28
FCB-301708	30	17	M8	29.6	3.4	100.5
FCB-302008	30	20	M8	20.2	4	80.8
FCB-303008	30	30	M8	10.2	6	61.2
FCB-502110	50	21	M10	102.0	4.2	428.3
FCB-754012	75	40	M12	95.1	8	761.1