



## DS405 *iPM* Lubrication Monitor

The **DS405** is an enhanced replacement for the DS300 and DS305 product range, a completely new dedicated product for the monitoring of automatic oil or grease lubrication systems.

The **DS405** is a highly configurable product that can be used on Oil Recirculation Systems and Total loss Oil or Grease Systems respectively.

Oil Recirculation Systems are real-time monitoring of the flow rate of oil, typically through a oval gear flowmeter.

The **DS405** records and displays

the flow rate delivered per channel.

Total Loss Oil or Grease Systems are time based and monitor the accumulative flow of a lubricant, typically through an oval gear flowmeter.

Unlike the Oil Recirculation system the Total Loss System is likely to have significant interval periods between each cycle.

The **DS405** records and displays the total lubricant delivered per channel and provides the end user with reliable, expandable, and accessible data capture.



### TYPICAL APPLICATIONS

- ◀ Concast segments
- ▶ Finishing & Roughing mills
- ◀ 5 Stand
- ▶ Morgoil
- ◀ Furnaces
- ▶ Coilers
- ◀ Runout tables
- ▶ Shears
- ◀ Levellers
- ▶ Accumulators

### Benefits:

A pair of global alarm and warning relay outputs are available on either High, Low, or High/Low flow rates. Each channel can be individually configured.


- + Low flow rate alarm prevents a bearing being starved of lubricant and failing
- + High flow rate alarm prevents the overfilling of bearings and lubricant spilling out
- + 24 Input channels with capacity for high speed pulses per second - up to 200 pulses per second
- + Choice of 3 Monitoring modes: Flow rate, Total loss, or Static per channel
- + Large Graphic Display for ease of setup and clear monitoring status
- + 2 off Volt-free change over relay common outputs: 1 for warning and 1 for fault
- + Programmable warning and alarm levels for each channel
- + Real-time clock with warning and alarm data logging up to 1000 events
- + USB port for downloading events i.e. log and monitor set up, uploading of monitor set up etc
- + Optional Bluetooth Module - allowing parameter transfer via USB as above.



## DS405 *iPM* Lubrication Monitor

### Operation:

The **DS405** has a user friendly interface and keypad that consists of 5 momentary push-button switches arranged in a physical format as follows:

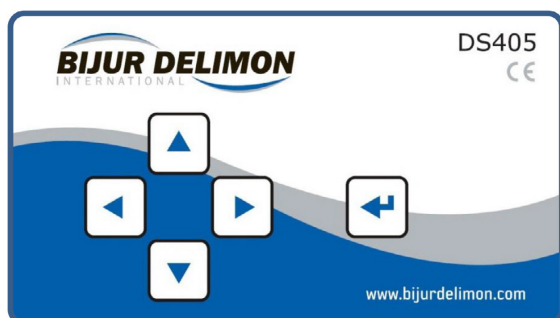

Enters menu and set key



Increment parameter or navigates up



Decrement parameter or navigates down



Select digit in numeric field or navigates right



Select digit in numeric field or navigates left.


### Programming and display information:

There are 3 different levels of system programming and 3 mode screens on the **DS405**.

NORMAL RUNNING MODE - status screen

DS405 Status				17:28 31-07-14
Channel	Rate/min	Label	Total	
1	616.2mL	Compressor Z1		
2	632.4mL	Compressor Z2		
3	627.0mL	Compressor Z3		
4	621.6mL	Compressor Z4		
5	27.0mL	Conveyor A1 Zone 1	525.5L	
6	32.4mL	Conveyor B1 Zone 1	539.7L	
7	Interval	Mixer Station K	153.0L	
8		Lubricant Tank 1 Low		
9		Lubricant Tank 2 Low		
10		System demand from PLC		
11		Unused		
12		Unused		

NORMAL RUNNING MODE - channel setup

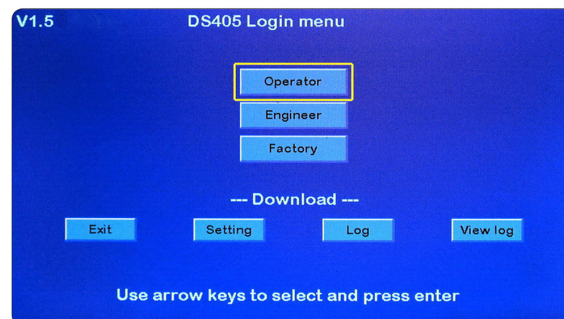



NORMAL RUNNING MODE - event / alarm screen

Alarm					11:37 01-08-14
Chan	Label	Fault	Time	Date	
8	Lubricant Tank 1 Low	Static	11:36:29	01-08-14	
7	Mixer Station K	Fault low	11:33:47	01-08-14	
9	Lubricant Tank 2 Low	Static	11:23:26	01-08-14	
1	Compressor Z1	Warn low	11:19:28	01-08-14	
	System event	Power on	11:16:49	01-08-14	
	System event	Power off	11:16:00	01-08-14	



## DS405 *iPM* Lubrication Monitor

Dimensional schematics:

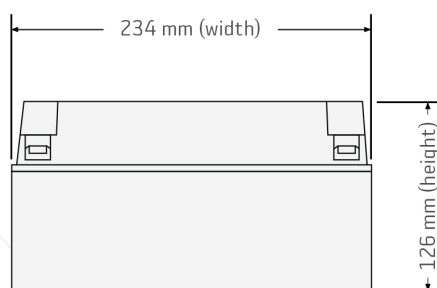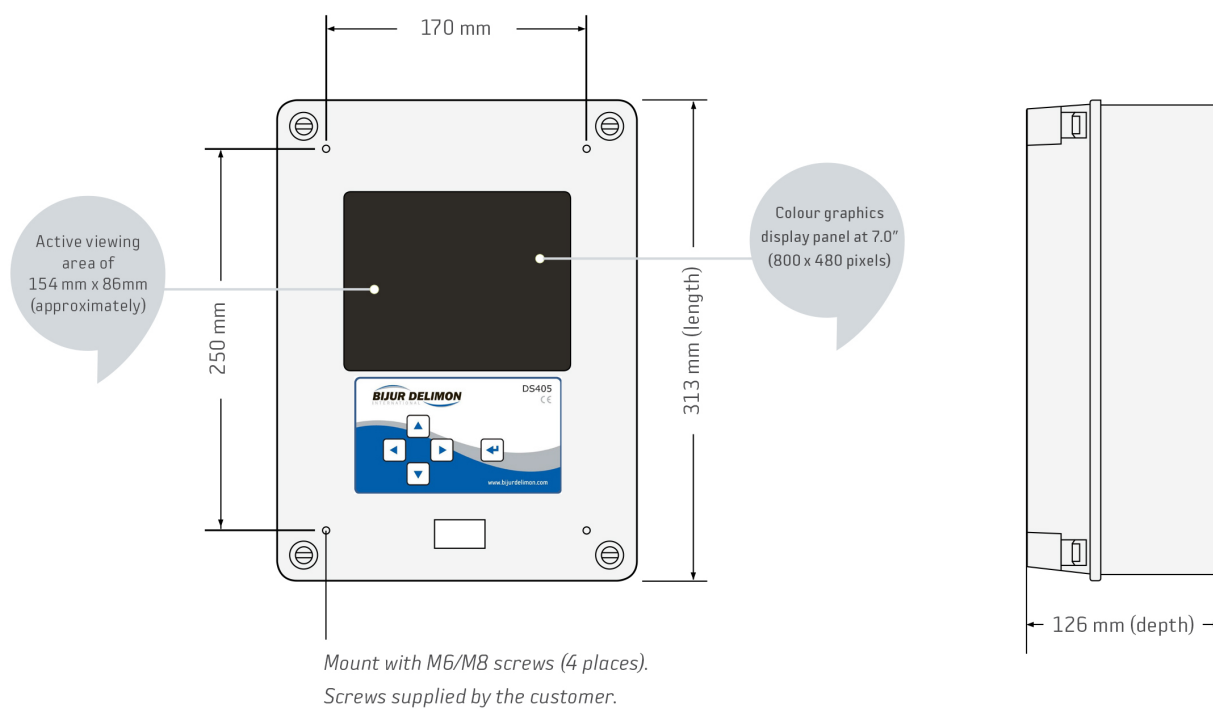

Optional mounting kit available upon request



## DS405 *iPM* Lubrication Monitor

### Specification:

General Details:	
Type of system	Oil Recirculation, Total Loss Oil, or Total Loss Grease
Industry type	Heavy Industrial and Light Industrial
Unit dimensions	W: 234 mm H: 313 mm D: 126 mm
Unit weight	6 kg
Unit enclosure material	PVC
Unit enclosure rating	IP56
Ambient operating temperature range	-10°C to +55°C
Electrical Details:	
Mains input power supply range	85-265v ac, 50/60hz Universal input 0.85a
Mains input power supply protection	2a
Control voltage power supply	24v dc
Control voltage power supply protection	1a
System grounding	6 mm chassis stud
Terminal connections	Screwless spring clip Wago 737 series max 2.5 mm
Alarms volt free contacts	1 x Warning, 1 x Fault
Alarms volt free contacts rating	5a @ 230v ac
Fuses (Control circuit only)	2AT 20 mm
Adjustable ranges:	
Pulse volume	Cycle <input checked="" type="checkbox"/> Litre <input checked="" type="checkbox"/> Millilitres <input checked="" type="checkbox"/> cm3 <input checked="" type="checkbox"/>
Static signal input	High tank level <input checked="" type="checkbox"/> Low oil pressure <input checked="" type="checkbox"/>

### Conformance:

#### The DS405 is designed to conform to:

- Low voltage directive 2006/95/EC
- EMC directive 2004/108/EC
- RoHS directive 2002/95/EC
- Storage Temperature -40°C to +85°C
- Operating Temperature -10°C to +55°C
- Environmental Rating - IP55

### Ordering & support:

Product Description	Code No.
DS405 Lubrication Monitor (Standard unit)	95408
DS405 Lubrication Monitor (Bluetooth unit)	95409
Mounting Bracket Kit (Optional)	95410
Lube Point Monitor	55105