



Product description Switching device SG-A

APPLICATION

The switching device SG-A is used as differential pressure switch in dual-line centralized lubrication system. When the differential pressure is 50 bar and/or 100 bar, it releases a pulse for the reversion of the directional control valve or for the monitoring of the system.

PRODUCT CHARACTERISTICS

- Switching pressure difference 50 or 100 bar
- Working pressure 400 bar




DESIGN

The switching device SG-A with ram, enclosed consists of a housing with a metallic sealing piston, which is held in its mid-position by means of two compression springs. Furthermore, it consists of a limit switch, which is fixed in its position by means of a safety plate, on which these parts are fixed.

FUNCTION

With lubricating cycle 1, lubricant is supplied to main line A. Main line B is relieved. Due to the pressure build-up in main line A, the piston is displaced downwards against the springiness of the lower compression spring. When the differential pressure between the two main lines is approx. 50 bar and/or 100 bar, the contacts 1 and 2 are closed via the piston at the limit switch. Due to this pulse, the 4/2-way valve is reversed via the electric control of the system. The reversion of the 4/2-way valve causes lubricating cycle no. 2 to start, and lubricant is supplied to main line B while main line A is relieved. Due to the pressure build-up in main line B, the piston is displaced upwards against the springiness of the upper compression spring. When the pressure difference between the two main lines is approx. 50 bar and/or 100 bar, the contacts 3 and 4 are closed via the piston at the limit switch, and a new reversion process is initiated.

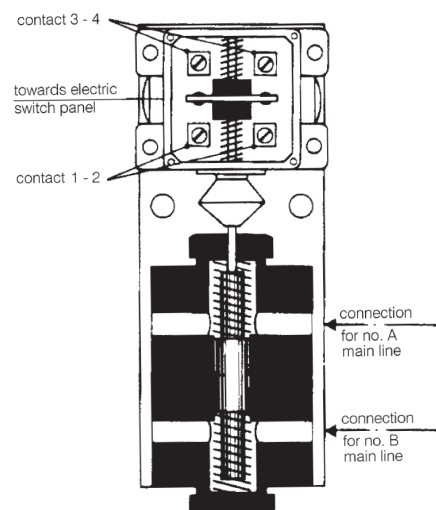





| A. TYPE OF APPLIANCE | Code |
|----------------------------------|------|
| | SGA |
| B. SWITCHING PRESSURE DIFFERENCE | Code |
| 50 bar | 05 |
| 100 bar | 10 |
| C. REVISION | Code |
| Status A | A |
| D. ACCESSORIES | Code |
| without | 00 |

SPECIFICATION

Switching pressure difference : _____ 50 or 100 bar
 Working pressure : _____ max. 400 bar
 Output volume : _____ 0.7 cm³
 Rated voltage : _____ max. AC 240 V
 Contact rating : _____ min. 10 mA at DC 24 V
 Contact rating : _____ max. 3 A
 Power rating at 500 V : . _____ max. 7500 VA
 Protection system : _____ IP 65
 Suitable lubricants on mineral oil basis:
 Lubricant greases _____ NLGI class 000 up to 3 DIN 51818 (51825)
 Oils _____ with a viscosity from 190 mm²/s at operating temperature
 Synthetic lubricants _____ on request
 Ambient temperature : _____ between - 20°C and + 80°C
 Installation position : _____ optional
 Weight : _____ 3 kg
 Switching diagram:



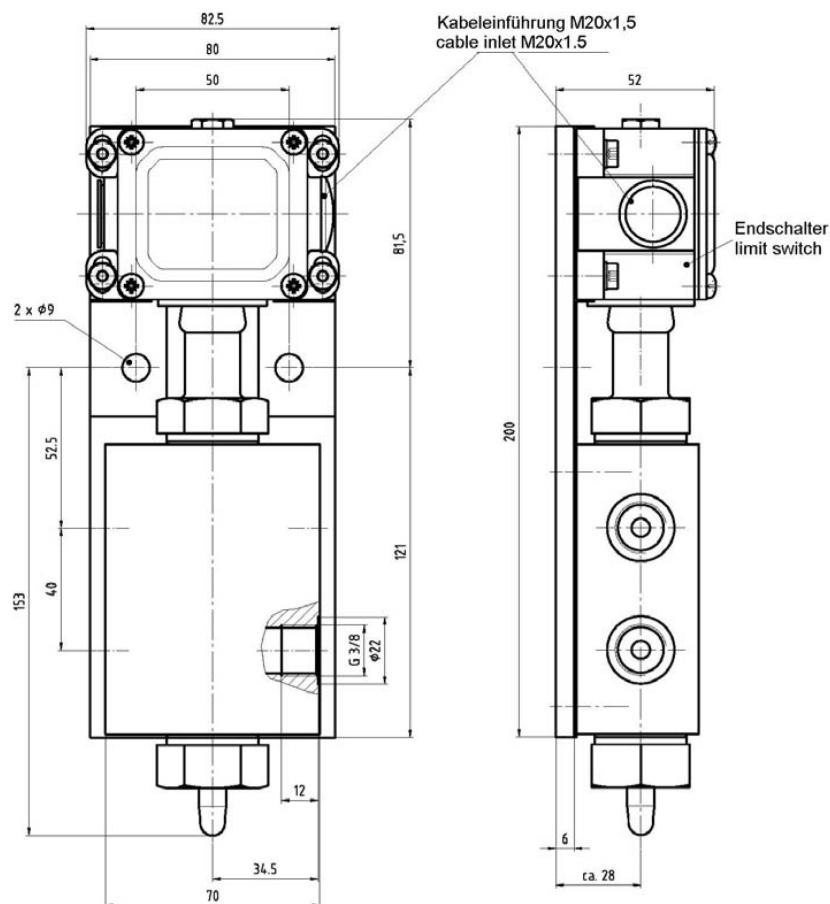

EXAMPLE OF ORDER

| | | Code | | | | | | | |
|-------------------------------|----------|------|---|---|---|---|---|---|---|
| | | S | G | A | 0 | 5 | A | 0 | 0 |
| Type of appliance | SG-A | — | | | | | | | |
| Switching pressure difference | 50 bar | — | | — | | | | | |
| Revision | Status A | — | | — | | | | | |
| Accessories | without | — | | — | | | | | |