


# Smart® Band Standard

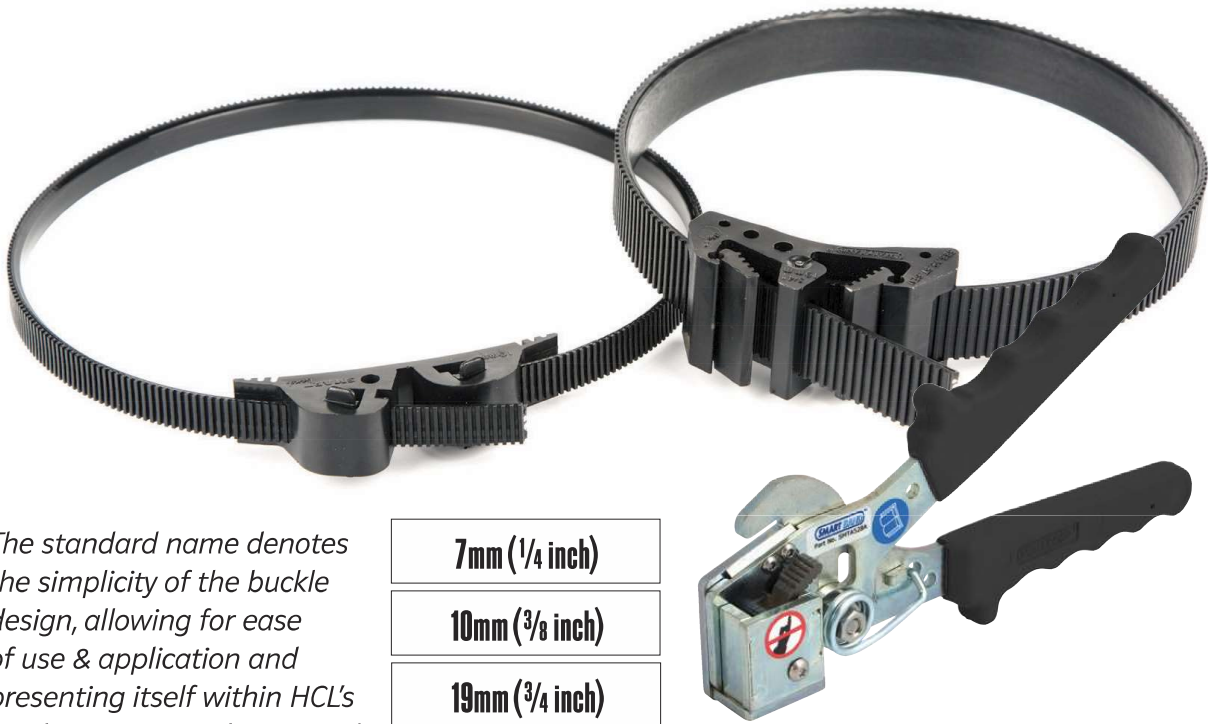

The standard name denotes the simplicity of the buckle design, allowing for ease of use & application and presenting itself within HCL's product range as the general industry solution.

- 7mm (1/4 inch)**
- 10mm (3/8 inch)**
- 19mm (3/4 inch)**

**Smart® Band Standard** is a non-metallic band and buckle system. Highly suited to lightweight applications such as temporary and permanent sign fixing and HVAC.

**Smart® Band Standard** system is available in a variety of materials, sizes and reel lengths. It offers long-life and non-corrosive properties, making it the ideal alternative to many high grade stainless steel strapping solutions.

## Key Features

- Strength up to 264kgf (581lbf)
- Non-corrosive
- Safe and easy to fit
- Long life materials
- Lightweight easy to use hand tools
- Highly suited for temporary sign installation

## Performance & Material

System			Max System Strength		Min Diameter		Max Diameter		Max Temp Resistance*		Flammability*
Dimensions		Material	kgf	lbf	mm	in	mm	in	°C	°F	
mm	in										
7	1/4	PA66	90	197	100	3.94	600	24	125	260	V-2
10	3/8	PA66	264	581	76	2.96	600	24	125	260	V-2
10	3/8	PA12	127	280	76	2.96	600	24	100	212	HB
19	3/4	PA66	440	969	75	3.00	800	32	125	260	V-2

\* Life expectancy is dependant on the working temperature. Refer to the Smart Products Technical Booklet for Downhole Use

## Dimensions, Part Numbers & Packaging

System				Band Dimensions				Buckle Dimensions			Buckle		
Dimensions		HCL Part No		Width		Thickness		Band Reel Lengths		Height	Length	Width	Pack Qty
mm	in	Band	Buckle	mm	in	mm	in	m	ft	mm/in	mm/in	mm/in	
7	1/4	SB-BA-1/4	SB-BU-1/4-ST	6.9	0.27	2.6	0.1	30/250	100/820	19.2/0.76	76.0/2.99	15.1/0.59	100
10	3/8	SB-BA-3/8	SB-BU-3/8-ST	9.8	0.39	3.6	0.14	30/125	100/410	21.5/0.85	77.2/3.04	22.9/0.9	100
19	3/4	SB-BA-3/4	SB-BU-3/4-ST	19.0	0.75	3.6	0.14	30/60	100/200	28.3/1.11	63.8/2.51	30.2/1.19	50

## Tool Options & Retention

System			Min System Retention			Speed of Installation	Tool Type	Tension Control
Dimensions		Tool	N	kgf	lbf			
mm	in							
7	1/4	SM-TA-528A	200	20	45	10 secs	Manual	Hand
10	3/8	SM-TA-528A	750	77	169	10 secs	Manual	Hand
19	3/4	SM-FT-1000-19	1200	122	270	20 secs	Manual	Torque Wrench
		SM-FT-2000-19	1200	122	270	10 secs	Manual	Hand