



Threading Equipment

The 690 Power Drive is the perfect lightweight and portable power drive for maintenance and repair workers, as well as service plumbers requiring 2" pipe capacity. It is a lightweight and powerful hand-held power drive designed for threading 1/4" to 2" (6-50mm) pipe with the use of 11-R die heads.

Comes equipped with a full set of 11-R die heads (1/2" to 2"), a 691 support arm and a durable carrying case.

Features:

- Capacity: 1/8" to 2" (6-50mm) pipe
- Weight: 19 lbs (8.6 kg), power drive only
- Length: 24" (61cm)
- Motor: universal 1.020 Watt, 230 or 115 V, 50/60 Hz
- Switch: heavy-duty paddle switch with safety lock-off device (automatically locks off when released), separate FORWARD/RELEASE switch
- Gear head: spur gear reduction/face gear drive
- All shafts, ball and needle are bearing mounted
- Permanently lubricated gear housing
- Gear housing: die-cast aluminium
- Body and handle: durable, heavy-duty, fibreglass reinforced industrial plastic
- Spindle speed: 32rpm (no load)
- Die heads included: 1/2", 3/4", 1", 1.1/4", 1.1/2" and 2" (type 11-R)
- Includes support arm: model 691
- Die head adapter: used with 1/8" through 1.1/4" die heads
- Carrying case



Model 690-I Power Drive

0494	Capacity	Type	Model	kg	⚡	£
44943	1/8" - 2"	Machine With BSPT Dies	690-C	25	115V	1979.15
44948	-	Machine Only	690	8.5	115V	1604.80

Standard equipment:

- Model 300 power drive with foot switch
- Model 811A or 815A universal die head
- 1/2" to 3/4" and 1" to 2" universal alloy die sets
- Model 360 cutter: capacity: 1/8" to 2" (6-50mm) pipe, 1/4" to 7/8" (8-22mm) rod with F-3 wheel, 5/16" to 1" (8-25mm) with E-1032 cutter wheel
- Model 341 reamer: positive-locking, 5-flute cone, right-hand 1/8" to 2" (6-50mm)
- Special E863 RH/LH combination reamer cone available
- Model 311 carriage with lever
- Model 1206 stand
- Oiler model 418 or oil pan assembly model 330



Model 300 Complete

0494	Capacity	Type	Model	kg	⚡	£
12891	1/8" - 2"	Machine With BSPT Dies	300C	85	115V	6902.50


Features:

- Heavy-duty, proven performance
- Lightweight, portable design
- Fast transport and set-up
- Self-contained oil system with adjustable flow control
- Versatility for threading and grooving
- Quiet operation

Capacity:

- Pipe: 1/8" to 2" (6-50mm)
- Bolt: 1/4" to 2" (6-52mm)

Stand not included please use part number 58077.

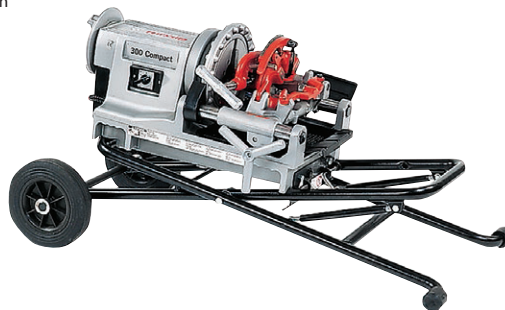

Model 300 Compact

0494	Capacity	Type	Model	kg	⚡	£
50692	1/8" - 2"	Machine With BSPT Dies	300 Compact	70	115V	6902.35

Hydraulics

Hydraulic Quick Release Couplings

Pneumatic Quick Release Couplings

Air Prep, Media, Monitor & Test

KELM™ Pneumatics

Pneumatic & Vacuum Equipment

Valves

Ring Main Systems

Adaptors & Fittings

Stainless Steel

Malleable Iron

Hose, Tubing & Couplings

Clamps & Clips

Sprays & Adhesives

Blow Guns, Vacuum & Nozzles

Pressure Wash, Fuelling & Lubrication

Air Tools & Compressor Equipment

Tools, Hardware & PPE