



NORPLAST® PVC 383

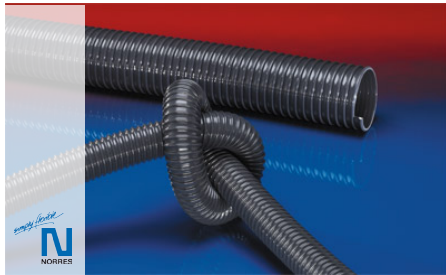

PVC hose, light

Applications

- flexible hose/ ducting for gases and for dust, powder, fibres
- galvanic extraction
- agricultural industry: irrigation, fertilizers, insecticides
- caravan/ trailer, mobile home/ camper/ RV, boat, ship/ vessel, yachts: sanitary installation, water supply
- X-ray machine: cable protection conduit (special type on request)
- magnetic resonance scanner, MRI : cable protection conduit, air supply hose (special type on request)
- medical device/ medical technology, health-care sector: cable protection conduit, air supply hose, extraction hose
- scrubber, floor cleaning machine
- vacuum lifting device, vacuum handling system

Properties

- light weight
- good resistance to alkalis and acids
- good resistance to chemicals
- flame-retardant according to: UL94-V2
- conforms to RoHS guideline

Temperature Range

- 5°C to 60°C

Design, Material

NORPLAST® full plastic hose

- hard plastic spiral integrated in wall; spiral: rigid PVC
- smooth interior; wall: soft PVC

Delivery variants


- further diameters and lengths available on request
- grey (standard)
- special colours: coloured spiral, full coloured
- customer-specific branding

I.D. in / mm	O.D. mm	Over- pressure bar	Under- pressure bar	Bending Radius mm	Weight kg/m	Dimensions in Stock m	Further Production Lengths m	Order No.
- / 20	26	1,000	0,250	15,0	0,120	-	25 50	383-0020-000
1 / 25	31	1,000	0,250	17,5	0,160	25 50	-	383-0025-000
- / 30	36	0,900	0,250	20,0	0,200	25 50	-	383-0030-000
1,25 / 32	38	0,850	0,200	19,0	0,210	25 50	-	383-0032-000
1,36 / 35	41	0,800	0,200	17,5	0,230	25 50	-	383-0035-000
1,5 / 38	45	0,750	0,200	26,0	0,260	25 50	-	383-0038-000
- / 40	47	0,750	0,200	30,0	0,280	25 50	-	383-0040-000
1,75 / 44-45	52	0,650	0,200	32,5	0,350	25 50	-	383-0045-000
2 / 50-51	58	0,500	0,200	35,0	0,430	25 50	-	383-0050-000
2,36 / 60	68	0,500	0,160	40,0	0,500	25 50	-	383-0060-000
2,5 / 63-65	71	0,450	0,160	38,5	0,520	25 50	-	383-0063-000
- / 70	78	0,400	0,150	55,0	0,580	25 50	-	383-0070-000
3 / 75-76	85	0,400	0,150	62,0	0,640	25 50	-	383-0076-000
- / 80	89	0,350	0,150	70,0	0,750	25 50	-	383-0080-000
3,5 / 89-90	100	0,300	0,140	80,0	0,850	15 30	-	383-0090-000
4 / 100-102	110	0,280	0,130	90,0	0,970	15 30	-	383-0100-000
- / 110	121	0,250	0,120	95,0	1,100	-	15 30	383-0110-000
4,72 / 120	131	0,250	0,100	100,0	1,200	-	15 30	383-0120-000
5 / 125-127	136	0,250	0,100	107,5	1,250	15 30	-	383-0125-000
- / 130	141	0,200	0,090	105,0	1,300	-	15 30	383-0130-000
5,5 / 140	152	0,200	0,090	105,0	1,450	-	15 30	383-0140-000
6 / 150-152	162	0,180	0,080	105,0	1,600	15	-	383-0150-000

Accessories



CLAMP 208



CONNECT 228



CONNECT 223



CONNECT 270-271